

Polyiso Roof Assemblies



An architectural insulation like no other®.

Foam-Control® PLUS+® is an architectural insulation product line with high compressive strength, stable R-value, and superior moisture resistance. Foam-Control PLUS+ is a premium grade insulation manufactured to provide architects, specifiers, distributors, and contractors all the features and benefits inherent in a high quality architectural insulation.

- High compressive strength of 15, 25, 40 or 60 psi
- High R-value that never changes and is stable over time
- Closed cell insulation with superior moisture resistance
- High drying potential to rapidly release absorbed moisture
- Lightweight with high strength
- Improve R-value of roof assembly

Strength/R-value.

FOAM-CONTROL PLUS+	Compressive Strength ¹ , psi	R-value/inch ²	
		75°F	40°F
150	15	4.2	4.6
250	25	4.4	4.8
400	40	4.4	4.8
600	60	4.5	4.9

¹ Compressive strength @ 10% deformation.

² R-value units are °F-ft²-h/Btu.

Foam-Control PLUS+ is available in a wide range of standard R-values and thicknesses to meet your needs.

R-5, R-7.5, R-10, R-15, R-20

Product thicknesses for standard boards are provided in the Foam-Control PLUS+ Thickness Selector. Project requirements vary, so Foam-Control PLUS+ can be ordered in any R-value thicknesses to meet your needs.


Proven to meet, or exceed, building codes.

Foam-Control PLUS+ is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER11812-04. Foam-Control PLUS+ meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



Sizes and Shapes.

- Foam-Control PLUS+ flat stock is typically provided in 4' x 8' or 4' x 4' boards with custom thickness from 1/2" to 12".
- Tapered Foam-Control PLUS+ is typically provided in 4' x 4' boards with various sloped taper as specified.
- Foam-Control PLUS+ crickets and saddles are available custom designed to your project requirements.
- Foam-Control PLUS+ flute filler is available custom designed to your deck requirements.

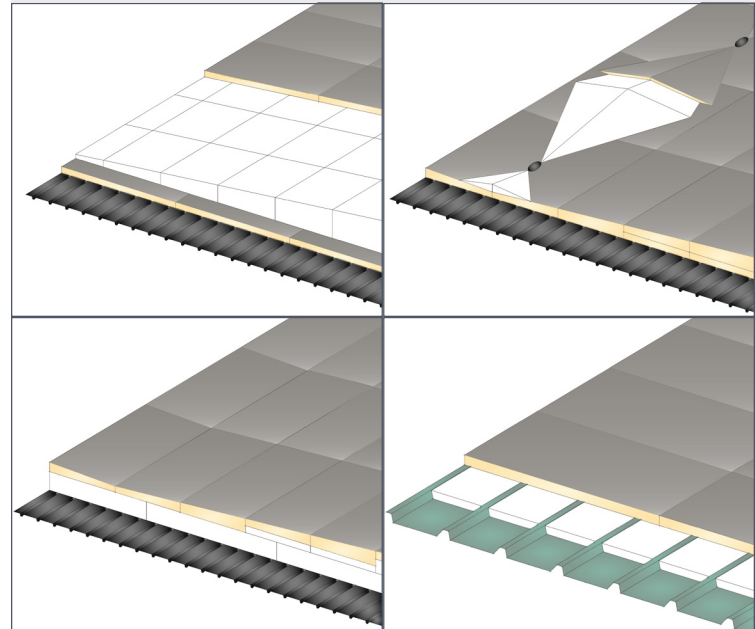

FOAM FACTS:

Foam-Control PLUS+ outperforms XPS.

- Foam-Control PLUS+ meets high strength requirements at a lower cost
- Foam-Control PLUS+ provides a stable long-term R-value at a lower cost
- Foam-Control PLUS+ uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- Foam-Control PLUS+ and XPS have resistance to moisture, but Foam-Control PLUS+ has a higher vapor permeance leading to superior drying potential
- Foam-Control PLUS+ with **GPerform Guard**® treatment available to provide termite resistance

Performance Value.

When you consider all performance characteristics and cost, Foam-Control PLUS+ is your best choice for high strength architectural insulation.

Foam-Control PLUS+ has a high compressive strength to meet specific project requirements.

Foam-Control PLUS+ has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

Foam-Control PLUS+ is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means Foam-Control PLUS+ maintains R-value.

Identification.

Each sheet of Foam-Control PLUS+ is clearly marked with R-value, compressive strength, and building code compliance.

Flexible Product Options.

Foam-Control PLUS+ is available factory scored and can be snapped to produce 16", 24", and 48" widths.

Termite Resistant - Perform Guard®.

One of the most destructive forces anywhere is termites. Foam-Control PLUS+ can be manufactured with Perform Guard, a proven and safe additive, that effectively resists termites.

Foam-Control PLUS+ with Perform Guard meets ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

Recyclable.

After it's life as a building insulation, Foam-Control PLUS+ is 100% recyclable. It can be ground into granules and reincorporated into new Foam-Control PLUS+ products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have Foam-Control PLUS+ contribute to your next project, just contact your nearest Foam-Control PLUS+ manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Foam-Control PLUS+ products, pricing, and answers to all of your questions.



**MOLDED
PRODUCTS**

A Division of Atlas Roofing Corporation

For further information contact us:

Phone: (800) 277-0967

www.atlasfoamcontrol.com



Foam-Control PLUS+ products are manufactured by AFM Corporation licensees.

Copyright © 2020 AFM Corporation. All rights reserved. Printed in USA. Foam-Control, Perform Guard, Foam-Control PLUS+ logo, and An Architectural Insulation Like No Other are registered trademarks of AFM Corporation, Lakeville, MN.

PLUS+ is a registered trademark of ACH Foam Technologies, Inc., Denver, CO. UL logo is a registered trademark of UL LLC. USGBC logo is a registered trademark of U.S. Green Building Council.

RP07-01/20



www.foam-control.com

**AN ARCHITECTURAL
INSULATION LIKE NO
OTHER®**